

Custom systems

Model 9412 buffer tank system

09/2023

Special features

- Improves performance of a pressure controller
- Connects to a vacuum pump or compressor source
- Aids with the transition of one set point to the next
- Two pressure gauges; one for each tank channel
- Pressure relief valves for over pressure safety
- Standard 1/4" bulkhead tube fittings



Description

The Model 9412 is a rack-mounted set of pressure tanks that users can utilize in concert with a pressure controller. Each model contains two three-gallon ASME Certified pressure tanks which are rated for a working pressure of 300 psi. The Model 9412 is commonly used as a subassembly of the Model 9415 multi-channel controller system.

Functionality

The Model 9412 buffer tank system contains two separate three gallon tanks. Each tank includes an input port, a measure port, an output port, an internal pressure relief valve, and a gauge. The model 9412 is ideally used with a pressure controller to provide additional volume which, in turn, helps to expedite the transition from one set point to another within a pressure control total system.

Each buffer tank is rated up to 300 psi and comes equipped with a pressure relief valve that can limit the pressure of the system to the need of the client.



Model 9412 - 3 Gallon dual tank system

Specifications


Model 9412

Basic instrument- Model 9412		
Buffer Tank		
Quantity	2	
Volume	3 gallons	
Pressure	ASME SPEC	
Dimensions		
Rack	19 in"	
Tall	10 1/2 in"	
Data entry	17 1/2 in"	
Pressure		
Maximum	300 psi (ASME MAWP -20 °F to 650 °F)	


Approvals

Logo	Description	Region
	(ASME MAWP -20 °F to 650 °F)	


Dimensions: inches [millimeters]

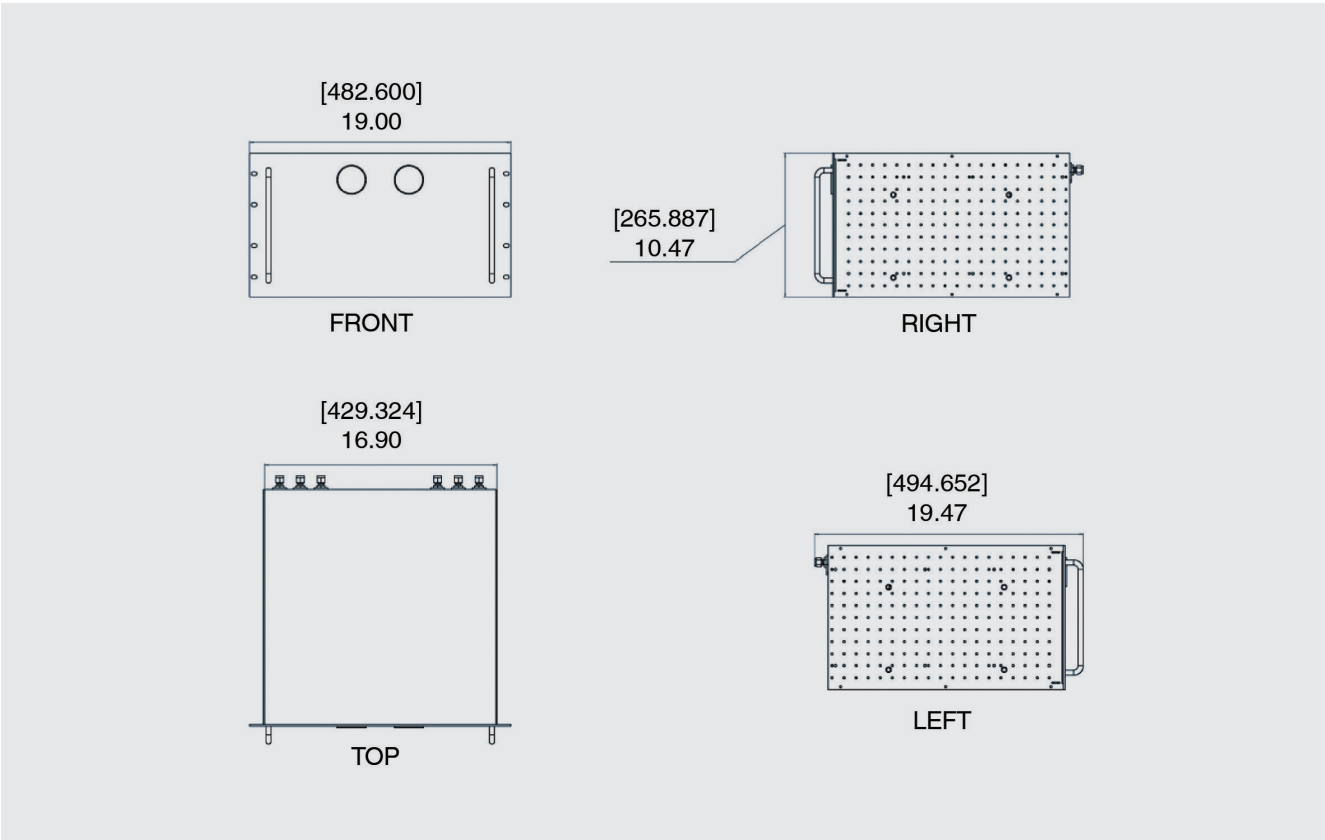


Front panel features

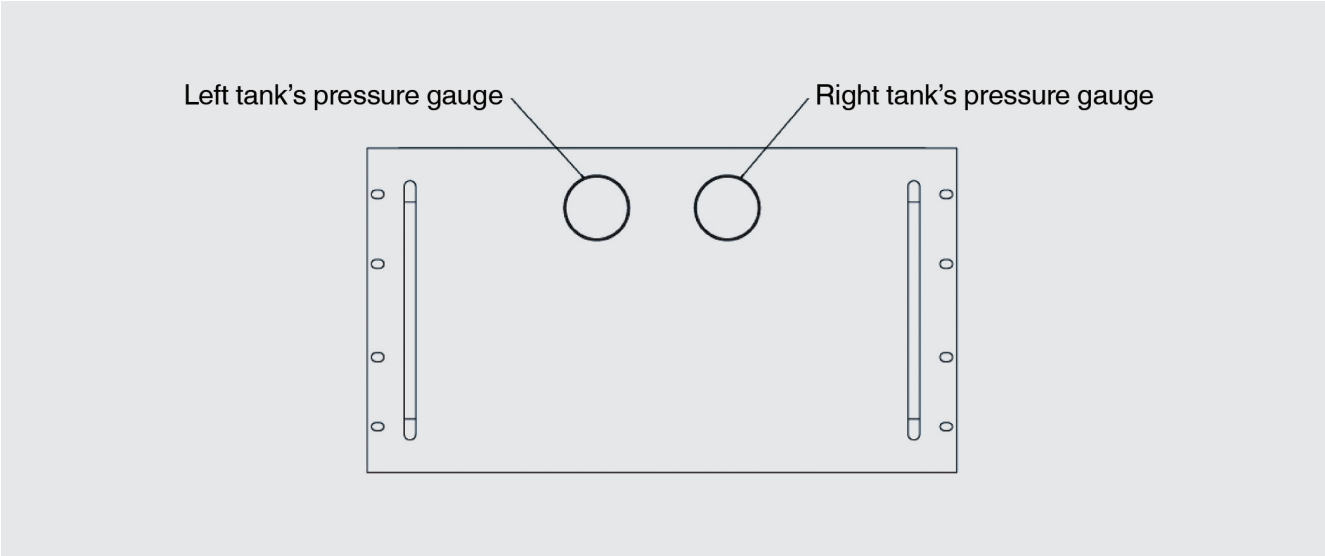

Rear panel features

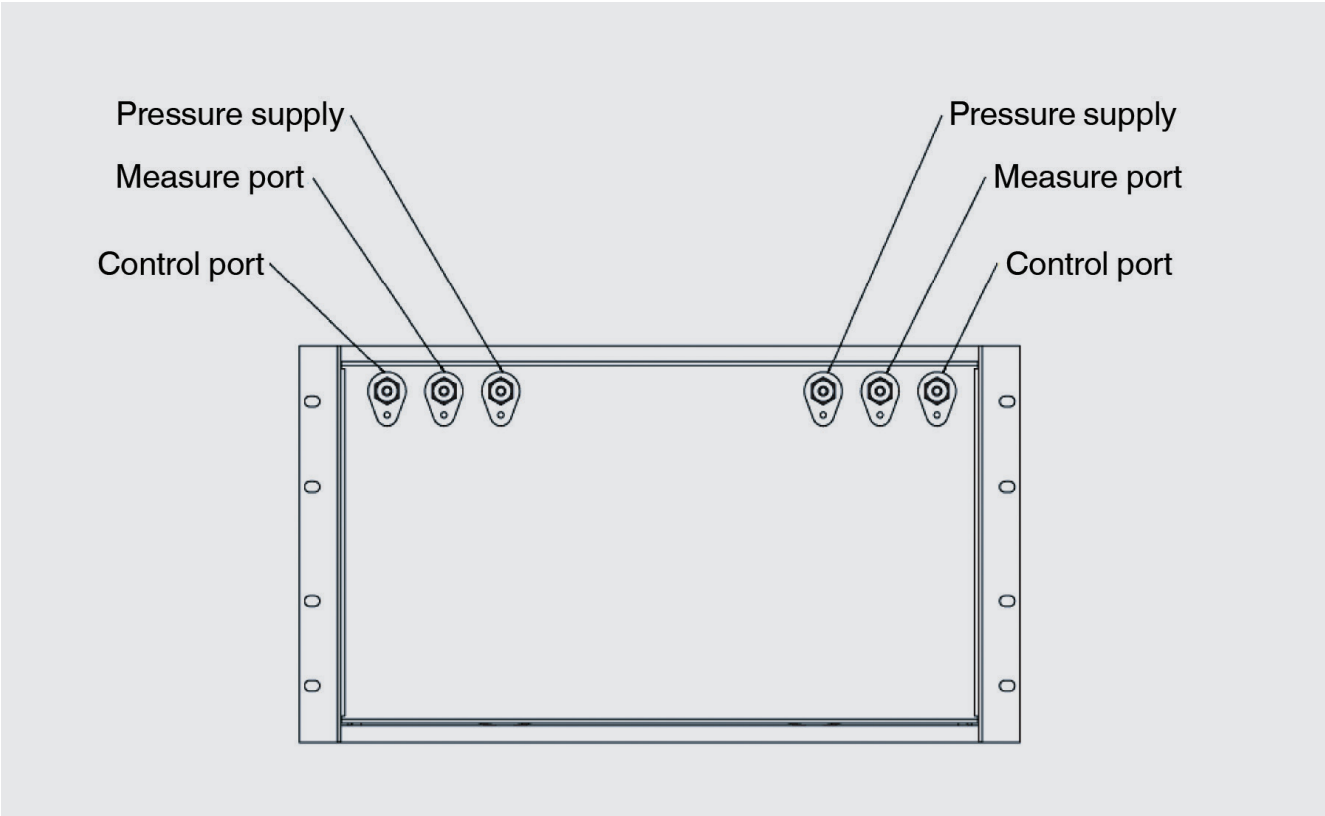

Pneumatic diagram

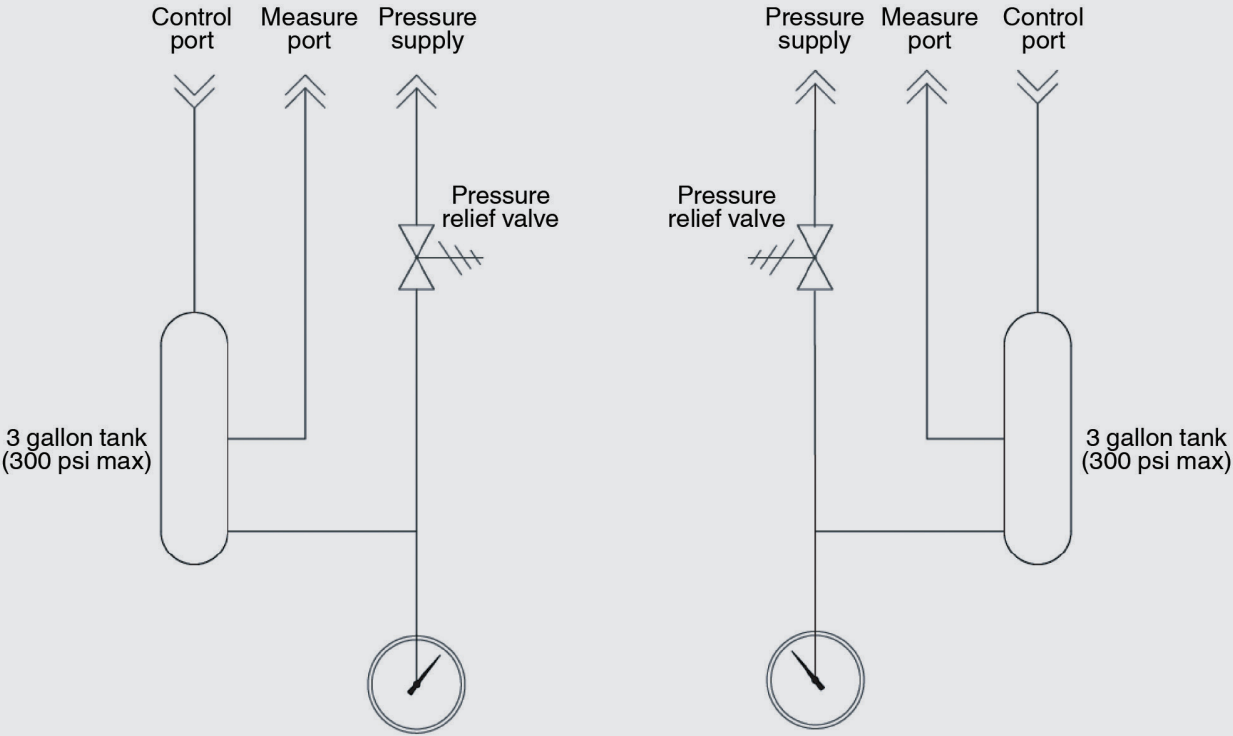

© 2023 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.



Mensor
201 Barnes Drive
San Marcos, TX 78666
Tel. (512) 396-4200
Fax (512) 396-1820
sales@mensor.com
www.mensor.com